SIRPOR2   9-4-2008
Rev 2.0   Mark Ryan
Rev 2.1   Tony Yankovsky

100 NW 11TH Street, Boca Raton, FL 33432
Tel. 561-955-9770   Fax. 561-955-9760
www.nav-tv.com   info@nav-tv.com

SIRPOR2USB

Compatible with 2005 and up, US Spec Porsche PCM Radio's equipped with radio software version 3.0 and up.

What's in the box	Package Contents
1. **Sirius MOST Interface** 2. **Interface Y- Adapter Harness** 3. **Fiber Optic Cable** 4. **USB Cable** (used for upgrading the firmware in the MOST Interface)	

What's in the Sirius box	Sirius box Contacts
1. **Sirius Tuner** 2. **Antenna w/cable** 3. **Mini-Din Interlink Harness** 4. **Antenna Cable guide** 5. **Mounting Screws** 6. **Sirius User Manual**	

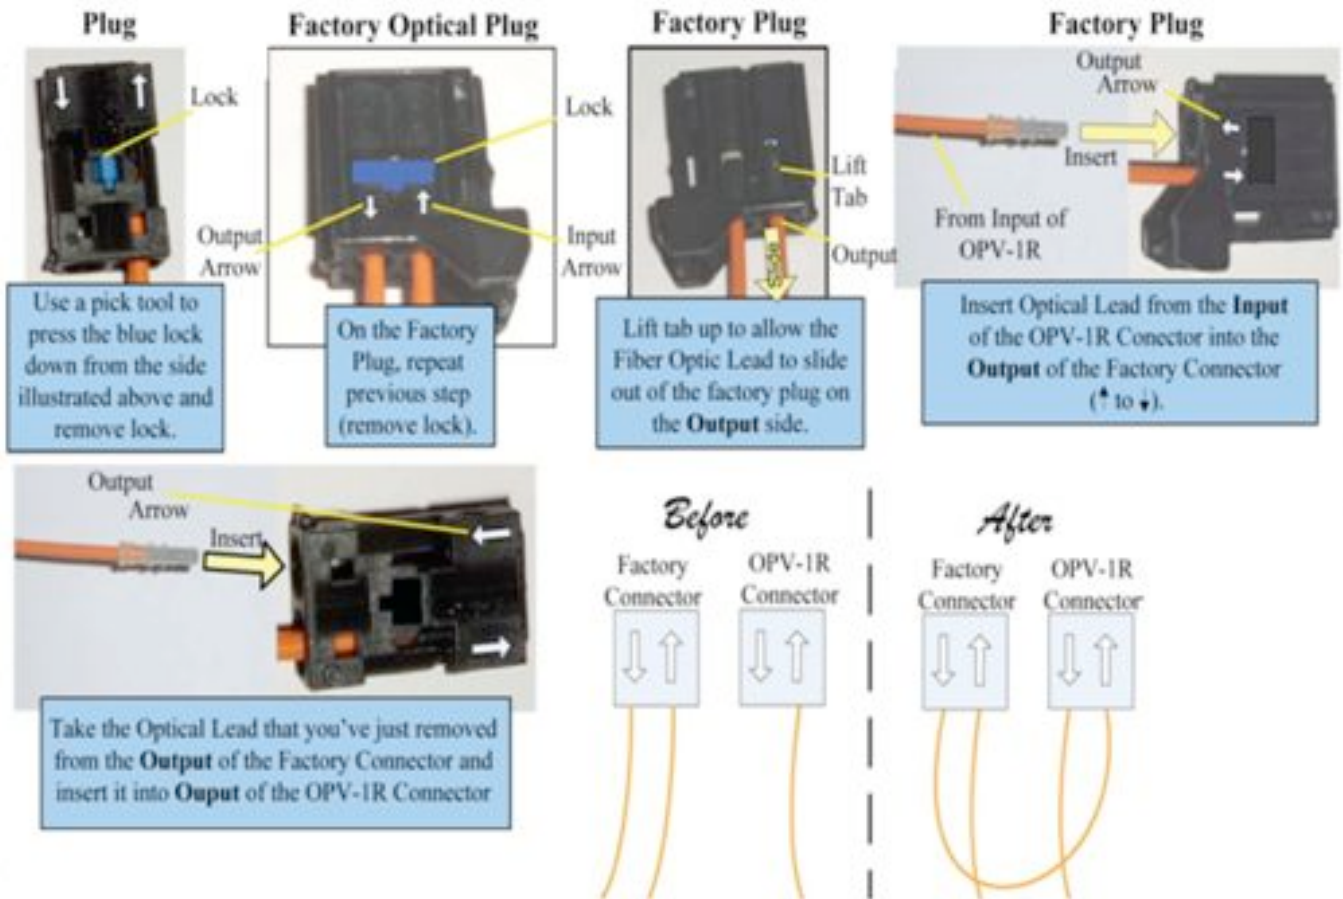| Radio Removal	Dash Image
On either side of the center console there will be a carpeted panel. Unscrew the panel (T27 torx) and set aside Remove two T20 screws on each side of the vinyl (leather) panels that were exposed by removing the carpeted panel. After the screws have been removed, take the plastic/vinyl cover and pull toward rear of vehicle and remove. (repeat steps for both passenger and drivers side panels) With the sides exposed, on passenger side, there will be a 6mm locking bolt through the side of the radio. Remove the screw. There will be (4) allen screws (2 on each side of the radio) on the side of the radio. Turn 1/4 turn counter-clockwise to release the radio. Pull the radio straight toward the back of the vehicle and proceed with the installation.	

Optical Cable Connections

Plug

Lock

Output Arrow

Use a pick tool to press the blue lock down from the side illustrated above and remove lock.

Factory Optical Plug

Lock

On the Factory Plug, repeat previous step (remove lock).

Factory Plug

Lift Tab

Input Arrow

Output

Lift tab up to allow the Fiber Optic Lead to slide out of the factory plug on the **Output** side.

Factory Plug

Output Arrow

Insert

From Input of OPV-1R

Insert Optical Lead from the **Input** of the OPV-1R Conector into the **Output** of the Factory Connector ($\blacktriangle$ to $\blacktriangledown$).

Output Arrow

Insert

Take the Optical Lead that you've just removed from the **Output** of the Factory Connector and insert it into **Ouput** of the OPV-1R Connector

Before

Factory Connector   OPV-1R Connector

After

Factory Connector   OPV-1R Connector

Plug everything back in making sure that all optical leads are locked into place and that the locks themselves are in place.

Navigating the SIRPOR2USB Interface
We recommend that you spend some time familiarizing yourself with the features and operation of the SIRPOR2USB while your vehicle is stationary. We incorporated several features into the product to allow quick and safe access to your favorite Sirius Stations using the head unit controls as well as the steering wheel controls. Specific head unit buttons have designated functions. Below are the buttons and menus options used to navigate with the SIPRPOR2USB and their descriptions.

Pressing the AM-FM button will switch between AM-FM and SAT. Selecting SAT will activate the SIRPOR2USB interface.		Main rotary knob (right knob), used for SIRPOR2USB navigation. Turning the knob left or right allows you to scroll through menu options. Once your desired menu option is highlighted, pushing the rotary button in will select that option.	

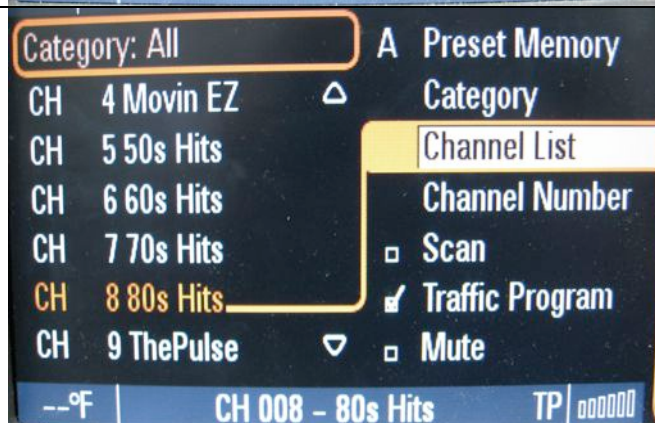|	
Browsing by Categories SIRPOR2USB allows you to browse SAT stations by numerous different categories such as Country, Electronica / Dance, Hip-Hop, Pop and many more. In order to browse by category, use the following steps. **Browse by Category** **Step 1: Select "Category" > Desired Category** **Step 2: Select Desired Channel**	
Browsing by Channel List You can view all the available channels in a selected list format by accessing the "Channel List" option from the main menu. Once you're in the channel list, use the right rotary knob on the head unit to scroll through and select your desired channel. **Browsing by Channel List.** **Step 1: Select "Channel List"** **Step 2: Select Desired Channel**	
Radio ID Number In order to activate the SIRPOR2USB interface with a Sirius service plan, you will need to know the **"Radio ID Number"**. In order to display the Radio ID Number use the following steps. "Note" If you do not see some of your subscribed channels, there is a possibility that your "Hide Category" or "Hide Channel" option in the "SAT Settings" menu is not set to "Show All" **Display the Radio ID Number** **Step 1: In the SIRPOR2USB main menu, press the "set" button on the head unit.** **Step 2: Select "SAT Setting".** **Step 3: Refer to the twelve digit Radio ID Number on the last line of the screen.**	