

NAV-TV

INTERFACING THE FUTURE

3950 NW 120th Ave, Coral Springs, FL 33065 TEL 561-955-9770 FAX 561-955-9760

C.O.D.-F5

Ford OEM 360 Surround-View Camera Controller
NTV-KIT899




BHM
11/27/18
NTV-DOC334

Overview

The COD-F5 (Camera-On-Demand) kit allows Ford SuperDuty trucks equipped with OEM (5-camera system) surround view cameras to be displayed on demand, without lock-out restrictions. Additional features include turn signal cameras, easy force rear cam & force front cam & last known camera retention (from hard camera button press). **NOTE: This kit will NOT program any camera system. This module is only intended for use in SuperDutys equipped with the OEM trailer package (5-camera system).**

Kit Content

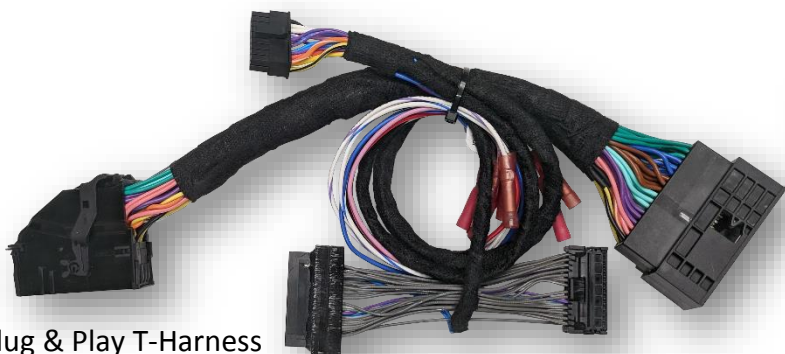

Plug & Play T-Harness
NTV-HAR329



COD-F5 Module
NTV-ASY301



USB cable (updates)
NTV-CAB009

COD-F5 Module Pin Out

Pin #	Description	Color
1	12v Constant Power (+)	Yellow
2	INPUT 1: <i>NOT USED</i>	Red
3	INPUT 2: <i>NOT USED</i>	Blue
4	INPUT 3: <i>NOT USED</i>	Pink
5	RX (OE camera button – button side)	Blue
6	CAN-3 HIGH (camera module)	Blue
7	CAN-2 HIGH (CAN gateway)	Blue
8	CAN-1 HIGH (APIM)	Yellow
9	CAN-0 HIGH (CAN gateway)	Yellow/Black
10	Ground (-)	Black
11	OUTPUT 1: <i>NOT USED</i>	White/Red
12	OUTPUT 2: <i>NOT USED</i>	White/Blue
13	OUTPUT 3: <i>NOT USED</i>	White/Purple
14	TX (OE camera button – module side)	Purple
15	CAN-3 LOW (camera module)	Purple
16	CAN-2 LOW (CAN gateway)	Purple
17	CAN-1 LOW (APIM)	Orange
18	CAN-0 LOW (CAN gateway)	Orange/White



Wire side

Agreement: End user agrees to use this product in compliance with all State and Federal laws. NAV-TV Corp. would not be held liable for misuse of its product. If you do not agree, please discontinue use immediately and return product to place of purchase. This product is intended for off-road use and passenger entertainment only.

COD-F5 Installation

1. Remove the 8" SYNC 3 screen (radio):

- a. Remove the center channel speaker cover on the top (middle) of the dash (4 clips only).




- b. Remove (2) 7mm bolts securing the top panel (previously hidden by the speaker grill).
- c. Remove the whole upper shelf panel, it should be held in by clips only, now. Disconnect the speaker lead. Set this panel assembly aside.



- d. Remove (2) 7mm screws on top of the climate/screen dash panel, and then pull panel straight towards you. Disconnect all harnesses and set the panel aside.




- e. Remove (6) 7mm screws securing the screen (APIM) to the sub-dash. Disconnect all harnesses and set the APIM aside.

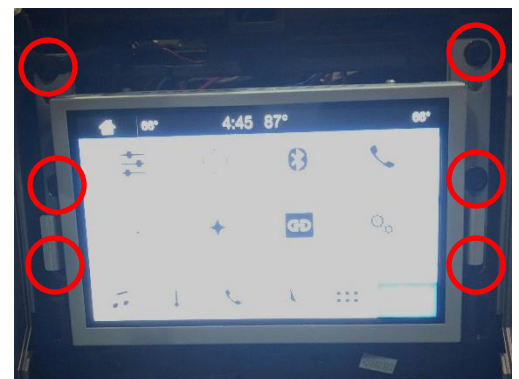

Agreement: End user agrees to use this product in compliance with all State and Federal laws. NAV-TV Corp. would not be held liable for misuse of its product. If you do not agree, please discontinue use immediately and return product to place of purchase. This product is intended for off-road use and passenger entertainment only.

2. Connect the provided T-Harnesses between the vehicle harness and the APIM (screen), and from the vehicle harness and the OEM camera module (directly behind screen).

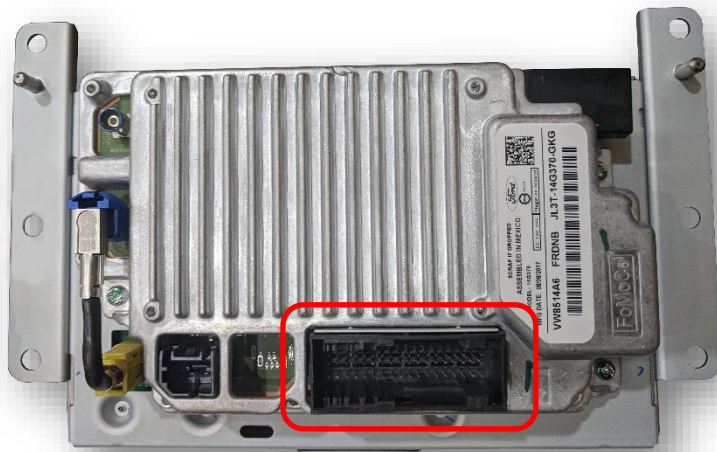


Rear of APIM (screen)



IPM (camera module)

3. **Optional:** If the user wants to use an analog trigger for camera display, wire the INPUT (for the forced feature desired) to a toggle switch so that the INPUT wire receives 12v (+) when activated. See pin out chart on page 2.
4. Connect the 18-pin plug to the VIM module and secure it in the sub-dash so that nothing rattles. *NOTE: No other wires from the unit are used for this installation.*
5. Return the screen to the sub-dash and reconnect the climate/screen surround panel for testing.
6. **Proceed to 'COD-F5 Operation'.**

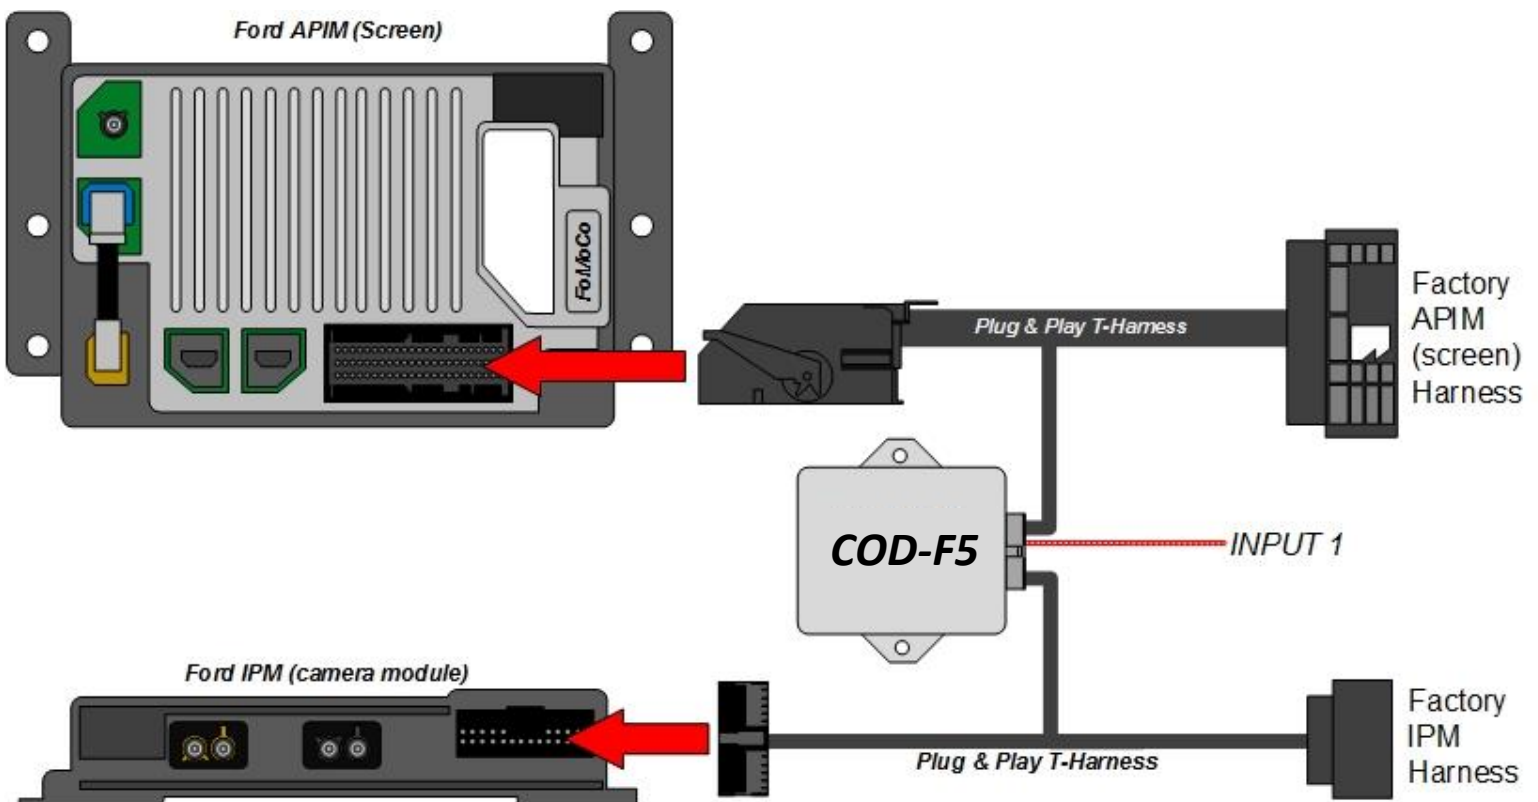

COD-F5 Operation (SuperDuty)

Once the COD-F5 module is connected properly, all added camera commands are performed through the factory camera button. Added features are outlined below:



**Camera
Button**

- **Single-Press camera button shows rear camera and rear cam options**** (default after ignition), press and release once again to clear



- **Double-Tap camera button shows front camera and front cam options**, press and release once again to clear



- **Last used camera image (whether front, rear, cargo or surround view) is retained when switching back and fourth from radio screen to camera screen via camera button** (instead of default surround view only with each press)

- **Turn signals switch to corresponding side view*** (left or right, panned 100%)

**NOTE: to disable turn signal camera activation, press and HOLD the camera button for 20 seconds (wait for tone). Once complete, turn signal cameras will deactivate. Repeat this process to reactivate TSC at any time.*

***NOTE: forcing the rear camera may affect NAV guidance temporarily. This is a factory limitation.*



NAV-TV

INTERFACING THE FUTURE



Agreement: End user agrees to use this product in compliance with all State and Federal laws. NAV-TV Corp. would not be held liable for misuse of its product. If you do not agree, please discontinue use immediately and return product to place of purchase. This product is intended for off-road use and passenger entertainment only.