
Installation Manual 997 Double-DIN Dash Kit



7. Place the metal frame into the dashboard.

Adjust it vertically with 10 mm of space to the top and bottom.





8. Use a soldering iron to heat up the plastic surface under the metal hooks left and right (4 on

each side) and press them into the heated plastic. (see arrows)



9. Push the head unit into the fixed metal frame until it snaps in.

Place the facia plate.


Reinstall everything in reverse order to finish installation.



Part No.: KIT-372 (Black) Part No.: KIT-373 (Silver)

- Porsche 911: 2005-2011
- Porsche Boxster: 2005-2011
- Porsche Cayman: 2005-2011

Compatible with Double-DIN devices

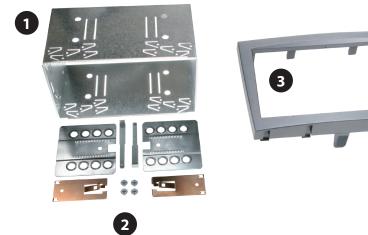

Double-DIN Kit contents:

• (1) Metal Frame

- (2) Installation Kit
- (3) Facia Plate

For technical support during business hours, please call (561) 955-9770 and select Option 2.

 $\ensuremath{\textcircled{\sc 0}}$ 2012 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidential or indirect damages.

Installation Manual 997 Double-DIN Dash Kit



1. Remove 2 Torx (TX25) screws (1 on each side) left and right, located at the front end of the center dash.



- Note: The screws are hidden in the carpet (see photo.)
- 2. Remove 4 Torx (TX15) screws (2 on each side.)







4. Loose one screw (7 mm,) located at the right side of the head unit.

Note: Just loosen the screw; don't remove! There is no screw on the left side.

- 5. Release the 4 retaining brackets of the OEM head unit (2 on each side) by turning them 90° (see arrows)
- 6. Remove the OEM head unit.



3. Remove the side panels (fixed with clips) by pulling them towards you.



Mount the metal brackets to the Double-DIN head unit.



The position of the copper colored holder can be adjusted to your needs for a perfect fit (see sample.)